



Tough. Resilient.



P.V.C. Wiring Pipes, Channels and Fittings
with *double* life.



konseal®

P.V.C. Wiring Pipes, Channels and Fittings

From an ISO Certified Company

www.konseal.com

Tough. Resilient.

The **konseal**[®] range of high quality PVC products are brought to you by TUBES & TUBINGS, an ISO Certified unit and one of South India's top manufacturing houses. **konseal**[®] specializes in PVC wiring pipes, Fittings and PVC Channels. **konseal**[®] has become the product of choice for responsible engineers and quality conscious end-users alike. With its highly organised network of dealers and capacity of over 1000 metric tons per annum, it is not surprising that **konseal**[®] rules for wide spread availability, reliability and affordability. Like the material that **konseal**[®] dedicates itself to PVC, the company has proven itself to be tough enough to withstand market pressures - and resilient enough to adapt to all kinds of market conditions.



Only virgin PVC goes into the making of **konseal**[®] - offering better quality, better fire resistance, and better shock resistance and 100% recyclable, thus making it environment friendly.

konseal[®] PVC Conduits. Shock-proof your life.

konseal[®] PVC Conduits conforming to IS:9537 are perfect for electrical applications, because of PVC's resistance to breakdown under high electrical voltage. It is also a poor conductor of electricity. **konseal[®]** range of conduits are resistant to weathering, chemical rotting, corrosion, shock and abrasion. Manufactured on fully automated machines, **konseal[®]** PVC Conduits are made of impact modifying, insulating compounds, mixed at 140°C in high speed mixers. With stringent quality control measures in place, it is no wonder that the product meets BIS Standards and is  certified.



konseal[®] PVC Conduit Specifications:

Size	Outside Diameter	Tolerance on outer Diameter	Inside Diameter			Wall Thickness			Standard Length (Meters)
			Light	Medium	Heavy	Light	Medium	Heavy	
16	16mm	-0.3mm	13.7 mm	13mm	12.2mm	1.0mm	1.35mm	1.75mm	3
20	20mm	-0.3mm	17.4mm	16.9mm	15.8mm	1.15mm	1.4mm	1.95mm	3
25	25mm	-0.4mm	22.1mm	21.4mm	20.6mm	1.25mm	1.6mm	2.0mm	3
32	32mm	-0.4mm	28.6mm	27.8mm	26.6mm	1.5mm	1.9mm	2.5mm	3
40	40mm	-0.4mm	35.8mm	35.4mm	34.4mm	1.9mm	2.1mm	2.6mm	3
50	50mm	-0.5mm	45.1mm	44.3mm	43.2mm	2.2mm	2.6mm	3.15mm	3
63	63mm	-0.6mm	57.0mm	-	-	2.7mm	-	-	3

konseal[®] PVC Conduits - Packing quantity per bundle

Item	Meters	Lengths
16 mm	450	150
20mm	300	100
25mm	150	50
32mm	75	25
40mm	75	25

Periodical Quality Tests

	Name of test	Nature of test
	Test of marking	The marking shall be indelible by petroleum sprit.
	Test of inner diameter	The inner diameter shall be verified by means of a GO gauge
	Test of minimum outer diameter	The minimum outer diameter shall be measured by means of a NO GO gauge.
	Test of maximum outer diameter	The maximum OD shall be measured by means of a GO gauge.
	Resistance to burning	When subject to a high intensity flame for 30 seconds, the conduit shall not burn by itself, after removing the flame.
	Resistance to heat	The Conduit is subjected to 60°C in a hot air oven and the resistance to heat is measured by means of the testing apparatus.
	Compression test	Force in the range of 125 N to 1250 N is applied depending on the class of conduit by means of the compression test apparatus. The dimensions should comply with the standards after release of compression pressure.
	Bending test	Bending test is conducted, by bending with the aid of spring and test apparatus, to 180 degrees. No cracks should appear after the test. Samples, which are cooled up to -5°C are also subject to the same test
	Insulation test	The conduits are tested for insulation at minimum 500 mega ohms.
	High voltage test	The conduits are subject to 2000 V AC by means of the test apparatus. No break down shall occur during the test.

Approvals

konseal[®] has won approvals from Government departments like
| PWD (Govt. of Kerala) | CPWD (Govt. of India) | Directorate General of
Supplies & Disposal (Govt of India) | Indian Railways | BSNL | Military
Engineering Service | Cochin Port Trust | Cochin International Airport
Ltd. (CIAL).

Various associations like | Kerala Electric Traders Association (KETA)
| Kerala Electric Wiremen and Supervisors Association (KEWSA)
| AKLSWA and ESLWA too have recommended **konseal**[®].

ISO Certification

Tubes & Tubings has become an ISO Certified unit in October 2004.
Certification was done by Intertek Certifications Limited, UK under UKAS
accreditation, which is one of the prestigious accreditation boards
worldwide.

Conduit Installation - Methods Surface Installation

In surface installation, the conduit is fixed using saddles or spacer bar
saddles. The maximum recommended spacing between the saddles is 1.0
m for the horizontal conduit runs and 1.25 m for vertical conduit runs.
Saddles should be fixed 20 cm on either side of bends or boxes. As PVC
conduit expands, with increasing temperatures, for expansion/contraction
movements in long straight runs, the use of an expansion coupling is
recommended every 6 m to absorb expansion and avoid conduit buckling.

Conduit Cable Capacities

Single-core PVC - insulated cables in straight runs of conduit not exceeding 3m in length.

For each cable, it is intended to use, obtain the appropriate factor from Table A.

Add all the cable factors so obtained and compare with the conduit factors given in Table B.


The conduit size, which will satisfactorily accommodate the cables, is that size having a factor equal to or exceeding the sum of the cable factors.

Single-core PVC - insulated cables in straight runs of conduit exceeding 3m in length or in runs of any length incorporating bends or sets.

For each cable, it is intended to use, obtain the appropriate factor from Table C.

Add all the cable factors so obtained and compare with the conduit factors given in Table D, taking into account the length of run it is intended to use and the number of bends and sets in that run.

The conduit size, which will satisfactorily accommodate the cables, is that size having a factor equal to or exceeding the sum of the cable factors.

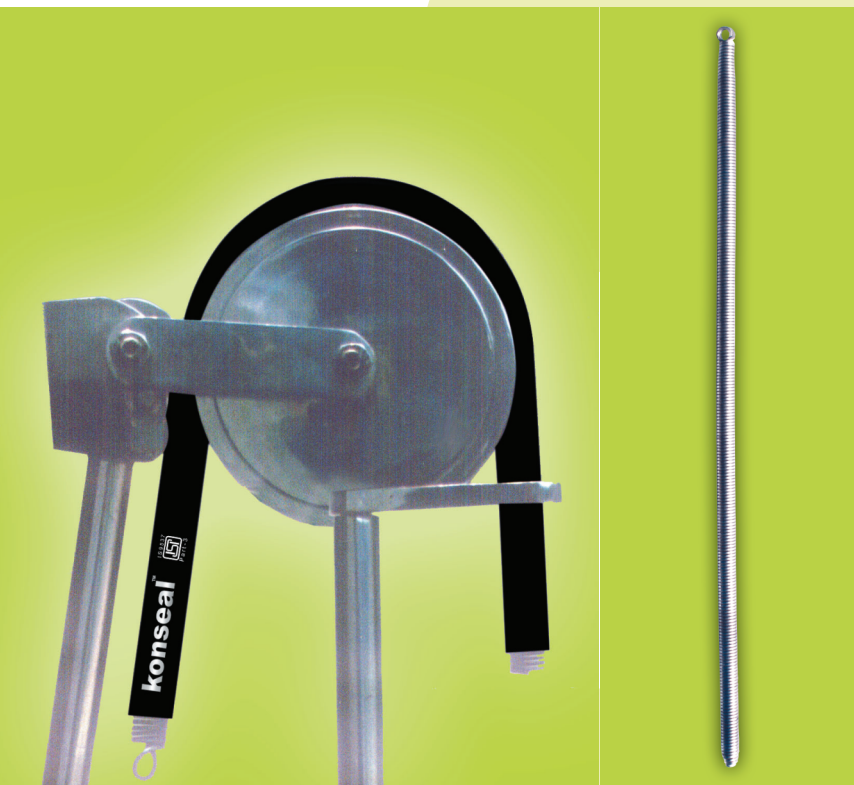

Conduit bending with the aid of spring and test apparatus.

Bending Spring

Bending

Bending of conduit up to 25 mm diameter can be carried out cold, using the correct bending spring size, according to the diameter and the gauge of the conduit. After inserting, the bend can be made by hand or across the knee, by bending slightly beyond the required angle, and allow the conduit to recover back to the required position. The bending should not be done too fast and once made a bend should not be forced backwards, as this action can lead to conduit or spring damage. According to IEE regulations, the bend inner radius should not be less than 2.5 times the conduit's outside diameter.

For conduit sizes over 25 mm diameter, hot bending is required with the same procedure as cold bending, but with the application of gentle heat just before bending. No open flame should be used for heating, rather a hot air torch or hot water. Once the conduit is warm, it can be bent around a suitable former and held there until it cools down and sets in position.

Our client list

APOLLO BUILDERS PVT. LTD., CALICUT

COCHIN INTERNATIONAL AIRPORT LTD.

COCHIN PORT TRUST

COCHIN SHIPYARD

CPWD. GOVT. OF INDIA

GODREJ AND BOYCE

HIRISE BUILDERS, THALASSERY

KANNUR INTERNATIONAL AIRPORT LTD.

KITCO

LANDMARK BUILDERS, CALICUT

MALABAR CANCER CENTRE, THALASSERY

MATHA AMRITANANDAMAYI MATH

NAVAL BASE, COCHIN

PWD. GOVT. OF KERALA


RAMADA HOTEL, TRIVANDRUM

RDS PROJECTS LTD.

SKYLINE BUILDERS

SOUTHERN RAILWAY

This list is not comprehensive.

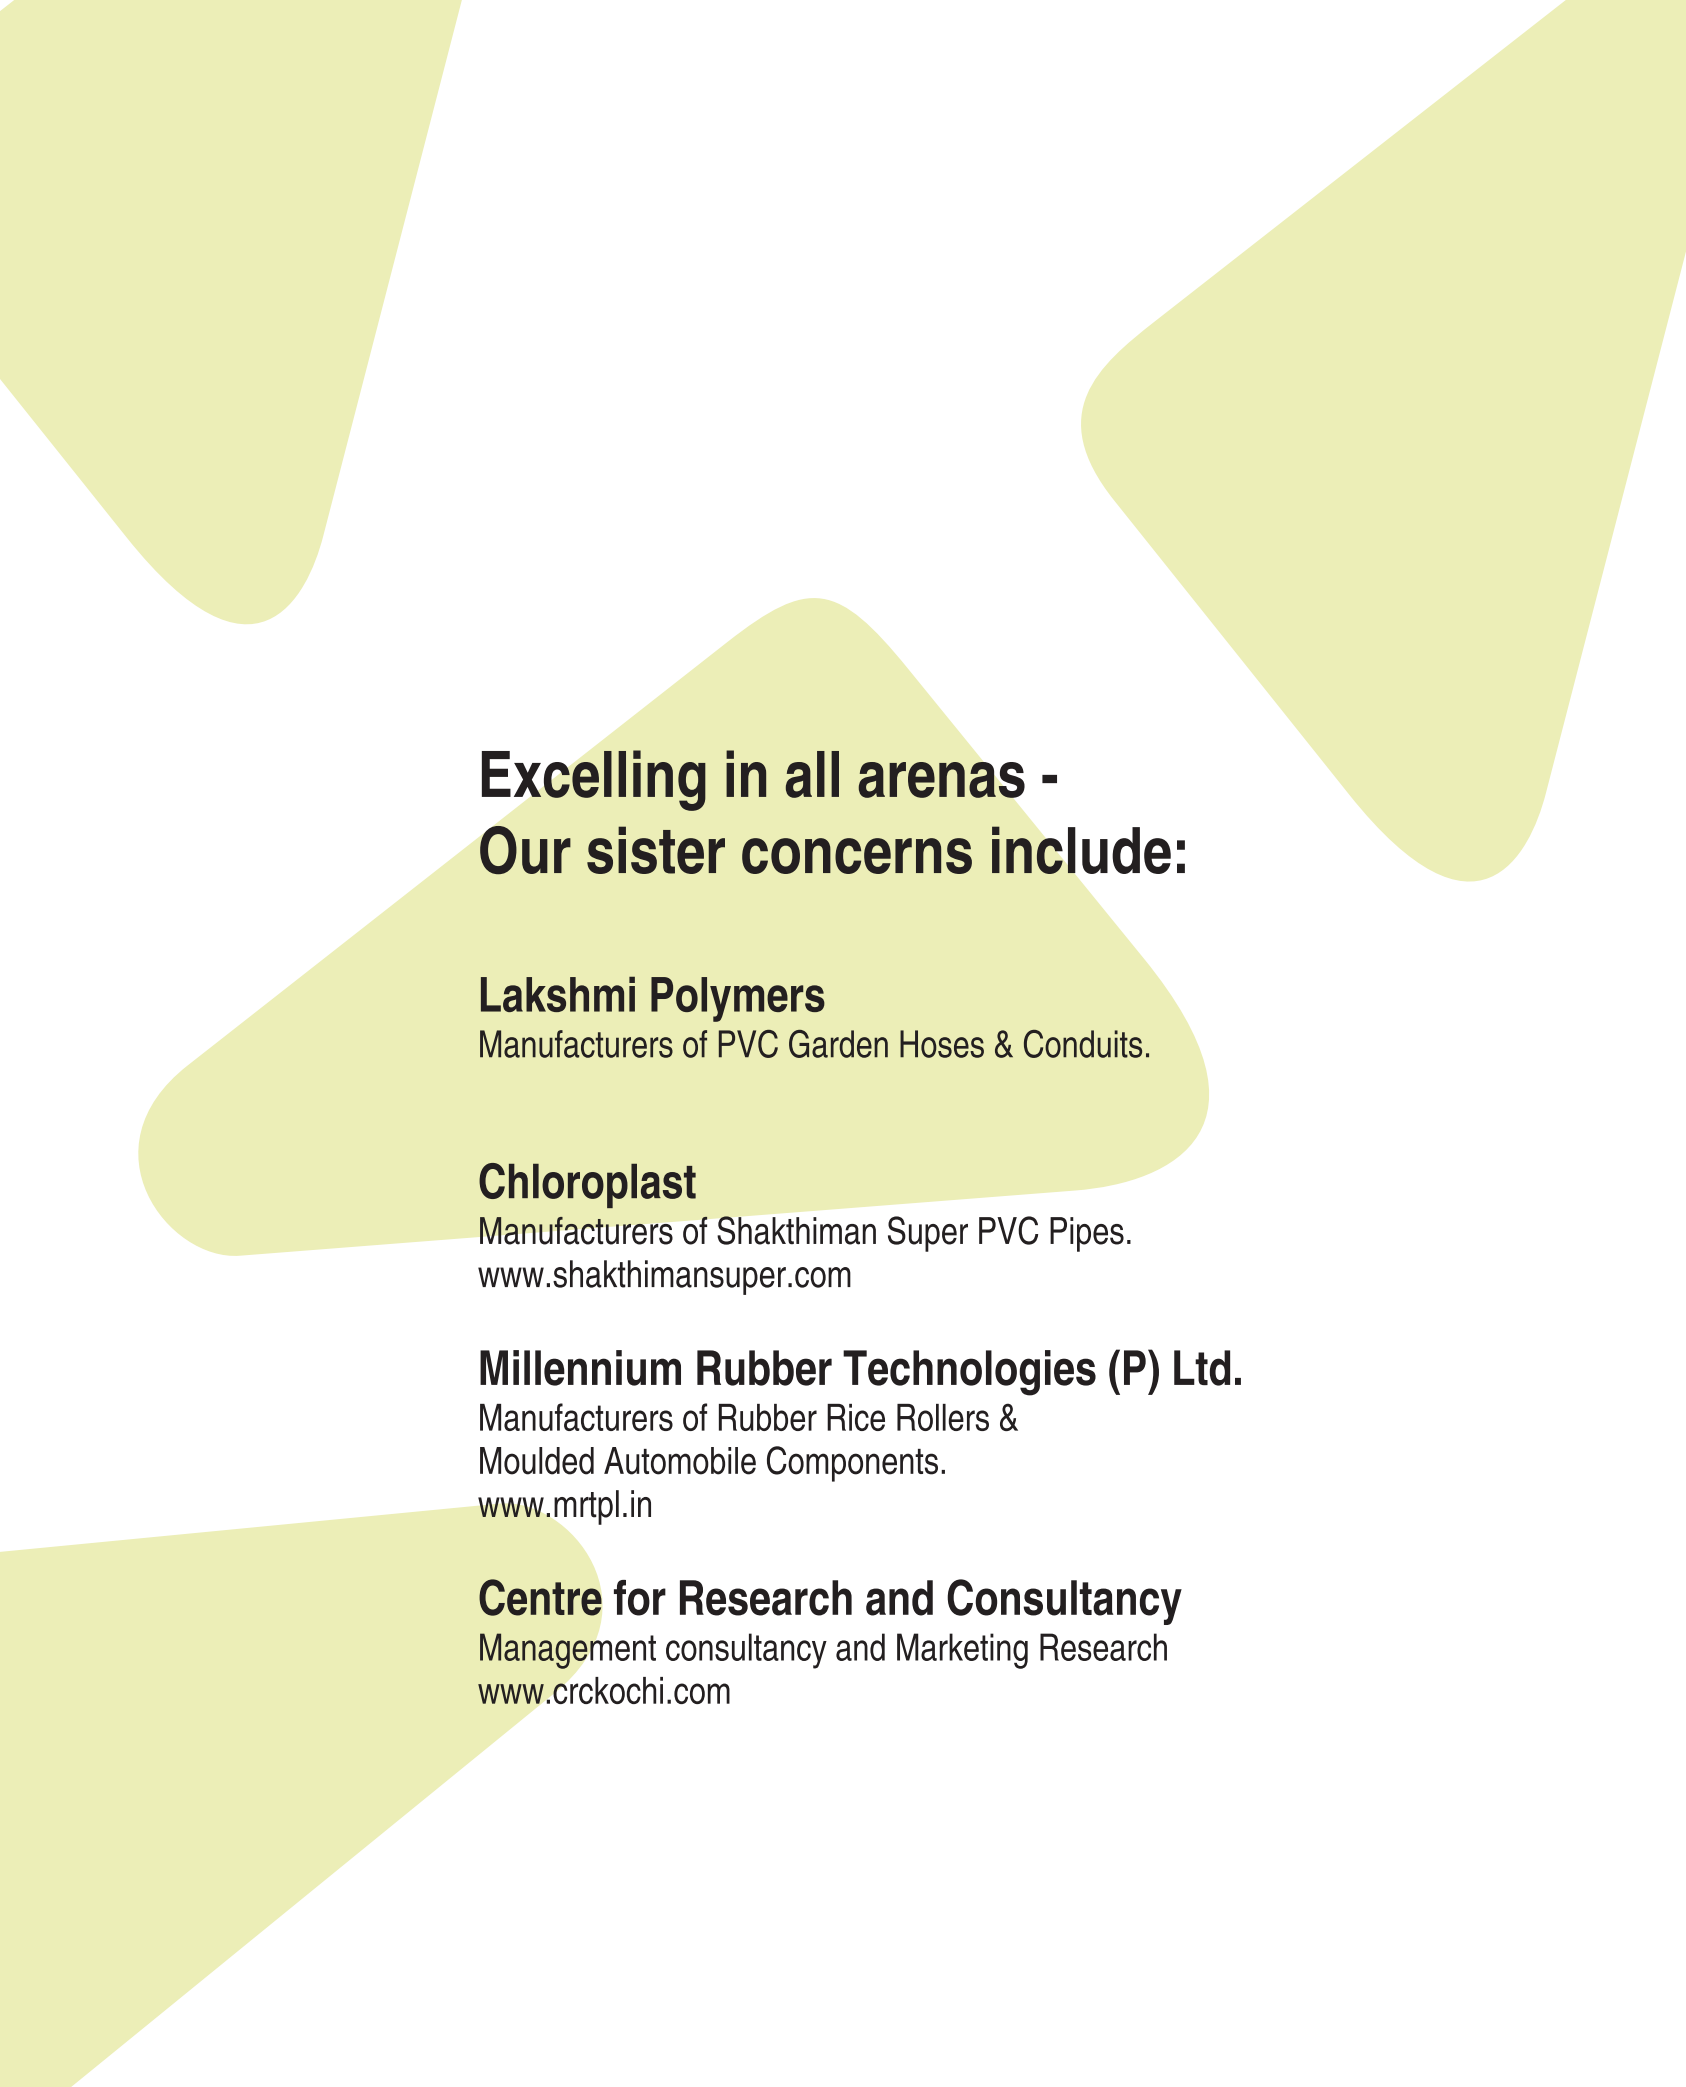

Excelling in all arenas - Our sister concerns include:

Lakshmi Polymers

Manufacturers of PVC Garden Hoses & Conduits.

Chloroplast

Manufacturers of Shakthiman Super PVC Pipes.
www.shakthimansuper.com

Millennium Rubber Technologies (P) Ltd.

Manufacturers of Rubber Rice Rollers &
Moulded Automobile Components.
www.mrtpl.in

Centre for Research and Consultancy

Management consultancy and Marketing Research
www.crckochi.com



Marketing Office: 3rd Floor, Khadi & Village Ind. Federation Building, Padivattom,
Edapally P.O., Cochin - 682024 Tele fax: 0484 - 2808308 / 2808708 / 2808908

Factory: Akanad, Mudakuzha P.O, Ernakulam - 683 546, Tel 0484 - 2649708, 2649808, 2641608

Email: tubesandtubings@gmail.com

Web: www.konseal.com

For more details call **Customer Care: 93886 19940**